

Remote I/O

Remote I/O IS1+ HART analog universal module

For Zone 1 Ex i

9468/32-08-11 Art. No. 210659



- Eight channels can be used individually as inputs or outputs
- Intrinsically safe Ex ia IIC inputs/outputs with line fault monitoring and LED error indication for each channel
- Module in Zone 1 can be hot swapped

WebCode 9468A



The 9468/32 series HART Analog Universal Module for Zone 1 has eight channels that can be used individually for Ex i operating two-/three-conductor HART transmitters, four-conductor transmitters or control valves/positioners with 0/4 to 20 mA signals. HART communication is bidirectional.

All inputs/outputs are short-circuit proof, galvanically separated from the system and individually monitored to check for line faults.

Technical Data

Explosion Protection

Application range (zones)	1 2 21 22
Application range (Zone) note	A suitable enclosure in accordance with the area of application must be used. Refer to the operating instructions.
Ex interface zone	0 1 2 20 21 22
IECEX gas certificate	IECEX DEK 12.0054X
ATEX gas certificate	DEKRA 12 ATEX0173 X
IECEX dust certificate	IECEX DEK 12.0054X
ATEX dust certificate	DEKRA 12 ATEX0173 X
FM certificate for USA	FM17US0332X
Certificate FM Canada	FM16CA0134X
Certificate EAC	TS RU S-DE.GB04.B.00448
Ambient temperature °C	-40 ... +75 °C
Gas explosion protection IECEX	Ex ia [ja Ga] IIC T4 Gb
Gas explosion protection ATEX	Ex II 2 (1) G Ex ia [ja Ga] IIC T4 Gb
Gas explosion protection USA FM	Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; Class I, Zone 1, AEx ia [ja] IIC, T4
Gas explosion protection Canada FM	Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; Class I, Zone 1, Ex ia [ja] IIC, T4
Gas explosion protection EAC	Ex II 2 Ex nA ia [ja Ga] IIC T4 Gc X

Remote I/O

Remote I/O IS1+ HART analog universal module

For Zone 1 Ex i

9468/32-08-11 Art. No. 210659



Explosion Protection

Intrinsically safe connection USA FM	IS; CL I,II,III, DIV 1, GP A,B,C,D,E,F,G; AIS; CL I,II,III, DIV 1, GP A,B,C,D,E,F,G; CL I, ZONE 1, AEx ia [ia] IIC; T4 at Ta = 75 °C; SEE DOC. 9468 6 031 001 1
Intrinsically safe connection CAN FM	IS; CL I,II,III, DIV 1, GP A,B,C,D,E,F,G; AIS; CL I,II,III, DIV 1, GP A,B,C,D,E,F,G; CL I, ZONE 1, Ex ia [ia] IIC; T4 at Ta = 75 °C; SEE DOC. 9468 6 031 001 1
Dust explosion protection IECEx	[Ex ia Da] IIIC
Dust explosion protection ATEX	⊕ II (1) D [Ex ia Da] IIIC
Dust explosion protection EAC	⊕ [Ex ia Da] IIIC
Certificates	ATEX (DEK), Brazil (ULB), Canada (FM), EAC (STV), IECEx (DEK), India (PESO), Korea (KTL), Russia (Meteorological certificate), USA (FM)
Ship approval	ABS, CCS, ClassNK, DNVGL, RINA
Installation	Zone 1, Zone 2, Zone 21, Zone 22 and in the safe area
Further information	see operating instructions and certificate

Safety Data

Max. voltage U_o	24.4 V								
Max. current I_o (2-conductor)	80 mA								
Max. power P_o (2-conductor)	488 mW								
Max. current I_o (3-conductor)	81.8 mA								
Max. power P_o (3-conductor)	499 mW								
Internal capacitance C_i	Negligible								
Internal inductance L_i	Negligible								
Max. connectable inductance L_o / capacity C_o									
2-wire input/output									
IIC	L_o [mH]	3.8	2	1	0.5	0.2			
	C_o [nF]	53	59	71	88	119			
IIB	L_o [mH]	23	10	2	1	0.5	0.2	0.1	0.05
	C_o [nF]	370	430	430	470	550	700	860	890
3-wire input									
IIC	L_o [mH]	3.6	2	1	0.5	0.2			
	C_o [nF]	53	58	70	87	119			
IIB	L_o [mH]	21	10	2	1	0.5	0.2	0.1	0.05
	C_o [nF]	380	420	420	470	550	700	860	890
Limits									
4-conductor transmitter	U_o , I_o , P_o , C_i and L_i are negligible. Maximum connectable safety characteristic values during operation with active 4-wire-transmitters:								
	Max. input voltage U_i [V]	Max. input current I_i [mA]			Max. ambient temperature T_{amb} [°C]				
	28	150			55				

Remote I/O

Remote I/O IS1+ HART analog universal module

For Zone 1 Ex i

9468/32-08-11 Art. No. 210659



28	140	60
28	130	65
28	115	70
28	105	75

Electrical Data

Number of channels	8 Ex i inputs/outputs
Channels	each with adjustable parameters as input or output (3-wire, 4-wire transmitters, or active mA-sources occupy 2 channels)
Notes	In order to operate an active 4-wire HART transmitter, a 9164 must be connected between each channel. 9164 is not required when operating 4-wire transmitter without HART communication.
Nominal signal	4 ... 20 mA 0 ... 20 mA
Min. signal	0 mA
Supply voltage	16 V, at 20 mA for 2-wire transmitters
Communication signal	HART protocol
Connection Ex i field signals	Pluggable, blue terminals, 16-pole, 2.5 mm ² , screw- or spring-type versions with lock

Signal transmission		Filter time constant (adjustable parameters)		
		small	medium	50 Hz, 60 Hz
	Resolution in the range 4 ... 20 mA	14.75 bit (with HART: 12.75 bit)	14.75 bit	14.75 bit
	Maximum delay from signal / internal bus	32 ms	120 ms	500 ms

Auxiliary Power

Power supply connection	BusRail types 9494
Auxiliary power version	Intrinsically safe Ex ia via BusRail
Current consumption	220 mA (at 20 mA per channel)
Max. power consumption	5.3 W (at 20 mA / channel)
Max. power dissipation outputs	3.7 W (at 20 mA. 500 Ohm / channel)
Max. power dissipation inputs	2.7 W (at 20 mA / channel)

Galvanic Isolation

Test voltage for gal. separation	According to standard EN 60079-11
Auxiliary power/system components	≥ 1500 V AC
I/O module / I/O module	≥ 500 V AC
I/O channels/system components	≥ 500 V AC
I/O channels / ground (PA)	≥ 500 V AC

Input

Max. signal for input	23.5 mA
Max. input short-circuit current	24 mA
Max. input resistance	14.1 Ω per channel

Output

Output step response (10 ... 90 %)	40 ms
Max. output short-circuit current	23,5 mA (0 ... 20 mA) 22,8 mA (4 ... 20 mA)
Max. signal for output	23.5 mA (0 ... 20 mA) 22.8 mA (4 ... 20 mA)

Remote I/O

Remote I/O IS1+ HART analog universal module

For Zone 1 Ex i

9468/32-08-11 Art. No. 210659



Output

Output load resistance max.	750 Ω at 20 mA 700 Ω at 21.8 mA
-----------------------------	--

Device Specific Data

Signal type	Output Input
Diagnostics message module	ON OFF
Signal filter module	50 Hz large 60 Hz large medium small
Scan HART live list module	ON OFF
Signal range	4 ... 20 mA 0 ... 20 mA
Input measuring range	2.4 ... 22.8 or 23.5 mA 3.6 ... 21 mA (acc. to NAMUR)
Line fault monitoring	ON OFF
Input behaviour in case of error	Alarm code, keep last value 110% 100% 0% -10%
Output behaviour in case of error	110% 100% 0% -10% Keep last value
Cyc. transmission of HART var.	4HV 8HV No
LED module requires maintenance	"M/S" LED, blue
LED operating conditions	"RUN" LED, green
LED group error	"ERR" LED, red
LED channel error	LED for each channel, red
Retrievable parameters	Type Software revision Serial number Manufacturer Hardware revision
Module status and alarms	Internal bus error primer / redundant No response from IOM Configuration does not correspond to the module Hardware error Excess temperature Slot error Module requires maintenance
Signal status bit	1 = Signal valid 0 = Signal interrupted

Remote I/O

Remote I/O IS1+ HART analog universal module

For Zone 1 Ex i

9468/32-08-11 Art. No. 210659



Device Specific Data

Wire breakage input	(adjustable param., at 4 ... 20) < 2,4 mA / 3,6 mA		
Short circuit input	> 23,5 mA > 22,8 mA / > 21 mA (adjustable parameters)		
Wire breakage output	Terminal voltage > 16 V (response range 16 ... 16.5 V) or output current can not longer be set		
Short circuit output	Output load < 60 Ω (response range 40 ... 60 Ω)		
Influence of ambient temperature	< 0,03 % / 10 K		

Accuracy of measurement			
Error of measurement with filter time constant	small	medium	50 Hz, 60 Hz
Maximum error of measurement	0.075 % (12 μA at 4 ... 20 mA)	0.05 % (8 μA at 4 ... 20 mA)	0.05 % (8 μA at 4 ... 20 mA)

Note: All values in % of the signal span at 23 °C

Ambient Conditions

Ambient temperature	-40 °C ... +75 °C Observe operating instructions
Ambient temperature	-40°F ... +167°F Observe operating instructions
Storage temperature	-40 °C ... +80 °C
Storage temperature	-40°F ... +176°F
Max. operating altitude	< 2000 m
Max. relative humidity	95% (without condensation)
Shock (semi-sinusoidal)	(IEC EN 60068-2-27) 15 g (3 shocks per axis and direction)
Vibration (sinusoidal)	(IEC EN 60068-2-6) 1 g in the frequency range 10 ... 500 Hz 2 g in the frequency range 45 ... 100 Hz
Electromagnetic compatibility	Tested to the following standards and regulations: EN 61326-1 (2006) IEC 61000-4-1 to 61000-4-6, NAMUR NE 21

Mechanical Data

Degree of protection IP (IEC 60529)	IP20
Module enclosure	Polyamide 6GF
Fire resistance (UL 94)	V2
Pollutant class	Corresponds to G3
Width	96.5 mm
Depth	68 mm
Length	128 mm
Width inches	3.8 in
Mounting depth inches	2.64 in
Length inches	5.04 in
Weight	0.275 kg
Weight	0.61 lb

Mounting / Installation

Mounting position	Vertical Horizontal
-------------------	------------------------

Remote I/O



Remote I/O IS1+ HART analog universal module

For Zone 1 Ex i






9468/32-08-11 Art. No. 210659

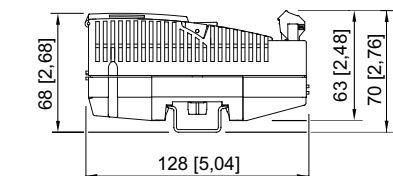

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations



Accessories and Spare Parts

Pluggable terminal		Art. No.
	2.5 mm ² with lock, 16-pole, screw connector, blue, for connecting the field signals to I/O modules, for intrinsically safe field circuits Labelling: 1 ... 16 Attention: An additional terminal is necessary for I/O module Series 9470 and 9482. Labelling: 17 ... 32	162702
	2.5 mm ² with lock, 16-pole, spring clamp connection, blue, for connecting the field signals to I/O modules, for intrinsically safe field circuits, incl. test jacks Labelling: 1 ... 16 Attention: An additional terminal is necessary for I/O module Series 9470 and 9482. Labelling: 17 ... 32	162695
mA-Isolating repeater		Art. No.
	The mA isolating repeaters are used for the connection of 4-wire transmitters to active 2-wire inputs and for the galvanic separation. Input: sink, Ex e Output: sink, Ex i	224365
	The mA isolating repeaters are used for the connection of 4-wire transmitters to active 2-wire inputs and for the galvanic separation. Input: sink, Ex i Output: sink, Ex i	224364
Resistor error message suppression		Art. No.
	The resistors are used to suppress error messages for unused I/O channels Resistance value: 5K6 / 0.5 W Suitable for: AIM 9468; DIOM 9470; DIOM 9471; DIOM 9472; DOM 9475 For intrinsically safe circuits (simple apparatus according to EN 60079-11)	244911
	The resistors are used to suppress error messages for unused I/O channels Resistance value: 62R / 0.5 W Suitable for: AOM 9468; TIM 9482	244912

Remote I/O

Remote I/O IS1+ HART analog universal module


For Zone 1 Ex i

9468/32-08-11 Art. No. 210659




Labelling strips

Art. No.

	FB Addr ... Mod No ..." for pluggable terminal, 26 pieces on the sheet	162788
--	--	--------


DIN A4 sheet

Art. No.

	For the label plate on I/O modules, 6 labels per sheet Print IS Wizard, packaging unit = 20 sheets	162832
--	---	--------


Warning sign

Art. No.

	"Clean modules only with a damp cloth."	162796
--	---	--------

Partition

Art. No.

	For mounting between intrinsically safe and non-intrinsically safe connections of the I/O modules, in order to adhere to the required 50 mm distance	220101
---	--	--------

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.