


ISO STAGED DRILL BIT | 678006

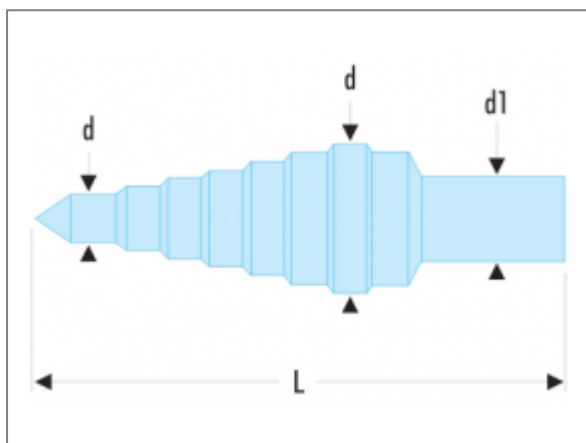

Description

- For cylindrical high accuracy drilling in all diameters.
- Does not require a tapping hole.
- Cylindrical shank with 3 flats for proper drive, avoiding micro locking.
- Marking of different diameters.
- 678014: Special PG cable gland.
- Panel drilling capacity up to 4 mm thickness.
- Shank diameter 10 mm.
- Min - max diameter: 6.5 - 8.5 - 10.5 - 12.5 - 16.5 - 20.5 - 25.5 - 29 - 32.5 - 36.5 - 40.5 mm.
- Length 96 mm.

Information

d mini - maxi [mm]	6,5 - 8,5 - 10,5 - 12,5 - 16,5 - 20,5 - 25,5 - 29,0 - 32,5 - 36,5 - 40,5
d1 [mm]	10
L [mm]	96
[g]	310